

Undercounter dishwasher - up to 40 racks, 720 plates / 1,440 glasses / hour





- **Fine filter GENIUS-X²**: up to 40% more removal of food soil
- **Rinse pump ACCURINSE** guaranteed rinse volume independent of site pressure
- **SMARTRONIC single button operation** with colour coded status
- **Patented wide angle FAN wash nozzles** distribute wash water evenly around the wash chamber
- **SELF-CLEANING** cycle
- Deep drawn tank, door and rack slides for maximum hygiene
- 240/50/1 - machine comes with single phase plug and lead
- **“Connect & use”** - Includes chemical dispensers, fill and drain hoses, power cord, non-return valve and drain pump.
- Supplied with 1 plate & 1 flat rack, plus cutlery basket

Technical Data

1. flexible drain hose 2000mm	Pump-out drain standard
2. fresh water connection: pressure hose 2000mm	Connection size: 3/4" BSP
flow pressure	50-1000kPA
water temperature	55-65°C
3. power cord	15amp single phase plug & lead
4. hose for detergent	2500mm each
5. hose for rinse aid	
cycle times	90 sec. 180 sec. 300 sec. (fill & dump)
water consumption	2.5litres
tank capacity	10.8 litres
tank heating	0.8kW
power supply	240/50/1 - 15amp
booster loading	2kW
total loading	2.9kW
pump capacity	0.6kW
noise emission	63dB(A)
loading height	425mm

Water hardness should not exceed 3°dH, if higher we recommend using a water softener.

If mineral content is high a demineraliser may be advisable.

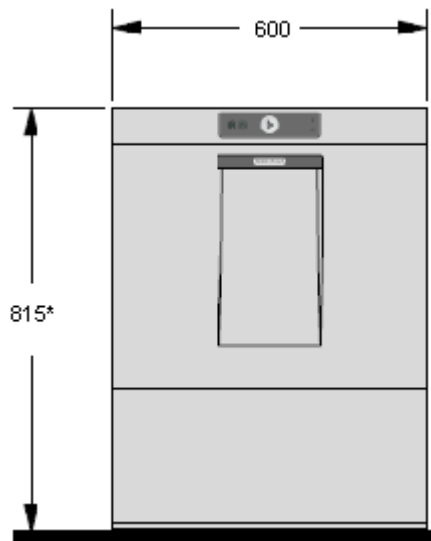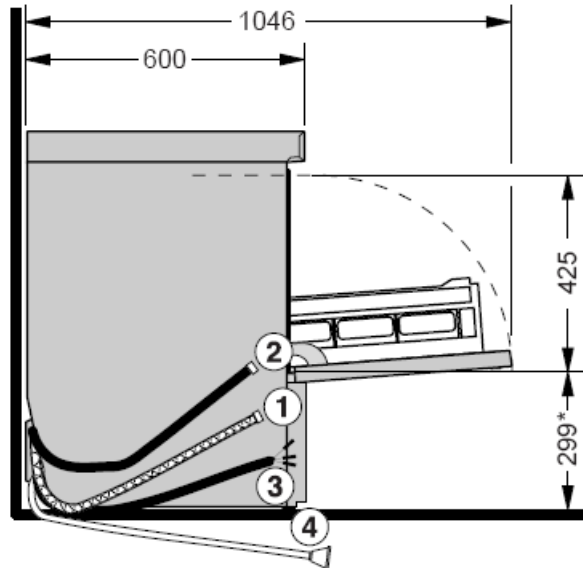

* = + 30mm for adjustable feet