


HOBART

WAREWASHING
UTENSIL WASHER **UPT**



PREMAX UPT

The **PREMAX** UPT offers all the advantages of the **PREMAX** UP combined with double the capacity compared to a conventional twin rack utensil washer.

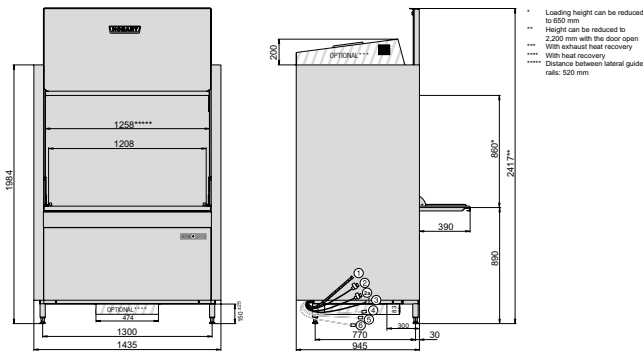

| CONNECTIONS | |
|-------------------------------|------------------------|
| ① Drain hose | 1,800 mm ID20 / OD25 |
| ② Supply hose | 2,000 mm R 3/4" |
| Required flow rate | 5 l/min |
| Flow pressure | 0.5 - 6 bar |
| Max. supply water temperature | 60 °C |
| ③ Power cord | 2,000 mm |
| Supply hose for | |
| ④ Detergent | 2,500 mm |
| ⑤ Rinse aid | 2,500 mm |

| TECHNICAL DATA | |
|-------------------|---|
| Cycle times* | 120 / 240 / 280 sec. and special cycles |
| Water consumption | 14 l/rack |
| Tank capacity | 130 l |
| Tank heating | 6.1 kW |
| Power supply | 415 / 50 / 3N |

| BOOSTER LOADING | |
|-----------------|---------|
| Standard | 18.1 kW |
| Alternative | 9.1 kW |

| TOTAL LOADING | |
|----------------------|------------------------------|
| Standard | 24.5 kW / 3 x 50 A |
| Alternative | 18.5 kW / 3 x 32 A |
| Wash pump | 2 x 2.9 kW 2 x 1,150 l/min |
| Rack size | 1,240 x 700 mm |
| Loading height | 860 mm |
| Noise level | 70 dB (A) |
| Weight (gross / net) | 325 / 305 kg |

* Thermostop guarantees required temperatures with cold water connection, the actual cycle times extend accordingly.

PRODUCT ADVANTAGES

- **Extra capacity by side wash system:** capacity up to 8 GN-trays 1/1 or 5 EN2 container
- **Detergent direct spraying system:** system soaks the wash ware following the detergent pre-washing cycle and softens even the most severely encrusted food residues
- **VISIOTRONIC control:** single button control with remaining time indicator together with text and graphic display
- **SENSO-ACTIVE resource management:** constantly measures the quality of the wash water and keeps the amount of rinsing needed in each rinse cycle to the minimum in order to guarantee a fully hygienic wash result
- **POWER wash:** high-pressure washing to wash heavily soiled wash items
- **CLIP-IN wash and rinse arms:** wash and rinse arms can be removed with one hand and without any tools
- **USB-interface:** comfortable download of operational data in form of a protocol via USB
- **GENIUS-X² fine filter system:** advanced filter system with pre-wash function reduces detergent consumption up to 35 %
- **ROTOR-X wash system:** separate rotating upper and lower 4-spoke wash arms deliver dynamic wash power
- **VAPOSTOP (optional):** prevents vapour to escape from machine when door is opened
- The optional **drain heat recovery** transfers heat from hot drain water to the fresh-water supply, saving up to 12.9 kW
- The optional **exhaust heat recovery** uses steam to heat fresh feed water and reduces the amount of power needed, saving up to 7.8 kW
- **Loading height:** above-average loading height of 860 mm
- **Intelligent energy management:** the available energy is used continuously. Thus, at a low total loading value the heating time gets reduced
- **VAPO-ACTIVE steam washing:** significantly less manual pre-cleaning and second runs by intensive wash cycles with steam injection
- **Interlocked strainer:** prevents operation without tank strainer
- **EASY-CLEAN concept:** blue markings in the machine help the operator to identify the components which require cleaning
- **Hygiene programme:** for removal of calcium carbonate and other deposits from wash chamber