

**HOBART**


**WAREWASHING**  
UTENSIL WASHER UX



## PROFI UX



Cleans pots and pans, cast iron cookware, baking tins, trays and racks with perfect wash results. Only HOBART can wash 4 bakery racks in one wash cycle.

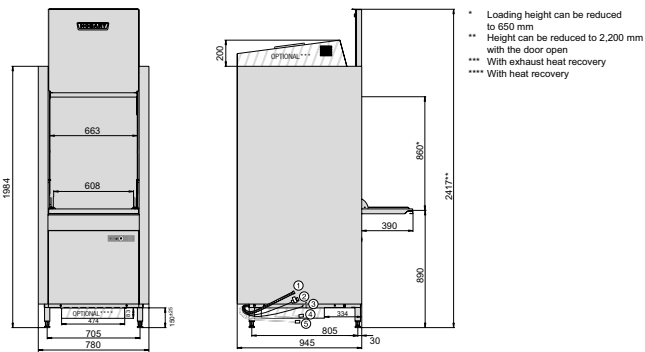

CONNECTIONS	
① Drain hose	1,800 mm   ID20 / OD25
② Supply hose	2,000 mm   R 3/4"
Required flow rate	5 l/min
Flow pressure	0.5 (0.8 with softener) - 6 bar
Max. supply water temperature	60 °C
③ Power cord	2,000 mm
Supply hose for	
④ Detergent	2,500 mm
⑤ Rinse aid	2,500 mm

TECHNICAL DATA	
Cycle times*	120 / 240 / 360 sec. and special cycles
Water consumption	4.5 l/rack
Tank capacity	80 l
Tank heating	3.3 kW
Power supply	415 / 50 / 3N

BOOSTER LOADING	
Standard	12.4 kW
Alternative	6.2 kW

TOTAL LOADING	
Standard	15.6 kW   3 x 25 A
Alternative	12.4 kW   3 x 20 A
Wash pump	2.9 kW   1.150 l/min
Rack size	600 x 760 mm
Loading height	860 mm
Noise level	60 dB (A)
Weight (gross / net)	225 / 205 kg

\* Thermostop guarantees required temperatures with cold water connection, the actual cycle times extend accordingly. For machine protection the water hardness should not exceed 3°dH, if higher we recommend using an integrated water softener or an external water softener of the product line HYDROLINE PROTECT.

## PRODUCT ADVANTAGES

- **VISIOTRONIC control:** single button control with remaining time indicator together with text and graphic display
- **SENSO-ACTIVE resource management:** constantly measures the quality of the wash water and keeps the amount of rinsing needed in each rinse cycle to the minimum in order to guarantee a fully hygienic wash result
- **POWER wash:** high-pressure washing to wash heavily soiled wash items
- **CLIP-IN wash and rinse arms:** wash and rinse arms can be removed with one hand and without any tools
- **USB-interface:** comfortable download of operational data in form of a protocol via USB
- **GENIUS-X<sup>2</sup> fine filter system:** advanced filter system with pre-wash function reduces detergent consumption up to 35 %
- **ROTOR-X wash system:** separate rotating upper and lower 4-spoke wash arms deliver dynamic wash power
- **VAPOSTOP (optional):** prevents vapour to escape from machine when door is opened
- The optional **drain heat recovery** transfers heat from hot drain water to the fresh-water supply, saving up to 5.2 kW
- The optional **exhaust heat recovery** uses steam to heat fresh feed water and reduces the amount of power needed, saving up to 3.1 kW
- **Loading height:** above-average loading height of 860 mm
- **Intelligent energy management:** the available energy is used continuously. Thus, at a low total loading value the heating time gets reduced
- **Machine height 2-in-1:** machine height can be reduced by up to 217 mm with the door open – for use in spaces with low ceilings
- **Interlocked strainer:** prevents operation without tank strainer
- **EASY-CLEAN concept:** blue markings in the machine help the operator to identify the components which require cleaning
- **Hygiene programme:** for removal of calcium carbonate and other deposits from wash chamber