

**HOBART**


**WAREWASHING**

HOOD-TYPE DISHWASHER **AUPL**



## PREMAX AUPL

The extra-wide premium model for cleaning large-sized wash ware. The PERMANENT-CLEAN automatic soil removal makes this model ideal for highest utilisation with heavily soiled gastronorm bowls, butcher's crates, or utensils.

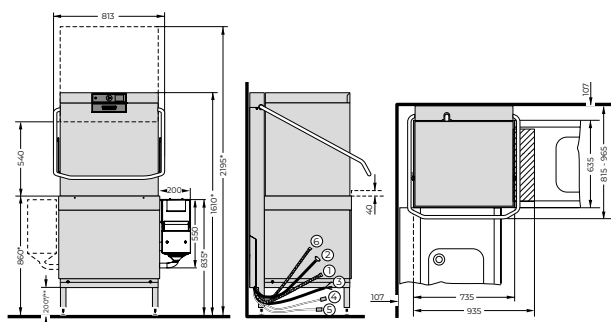

### CONNECTIONS

① Drain hose	2,000 mm   ID 20 / OD 25
② Supply hose	2,000 mm   R 3/4"
Required flow rate	5 l/min
Flow pressure	0.5 (0.8 with softener) - 10 bar
Max. supply water temperature	60 °C
③ Power cord	2,500 mm

Supply hose for

④ Detergent	2,000 mm
⑤ Rinse aid	2,000 mm
⑥ Drain hose PERMANENT-CLEAN	2,000 mm   ID 20 / OD 25

### TECHNICAL DATA

Cycle times*	52 / 70 / 170 / 180 sec. and special cycles
Water consumption	1.4 l/rack
Tank capacity	40 l
Tank heating	2.5 kW
Power supply	400 / 50 / 3N

### BOOSTER LOADING

Standard	12.4 kW
Alternative	6.2 kW

### TOTAL LOADING

Standard	17.0   3 x 35 A
Alternative	10.8   3 x 25 A
Wash pump	1 x 1.1 kW + 1 x 0.7 kW
Rack size	500 x 500   600 x 500 mm
Loading height	540 mm
Noise level	66 dB (A)
Weight (gross / net)	170 / 150 kg

\* Thermostop guarantees required temperatures with cold water, the actual cycle times extend accordingly. For corner operation we recommend to make the right side of the machine accessible for service. For machine protection the water hardness should not exceed 3°dH, if higher we recommend using an integrated water softener or a HOBART HYDROLINE water treatment system.

## PRODUCT ADVANTAGES

- **PERMANENT-CLEAN automatic soil removal:** innovative filter system eliminates manual pre-cleaning. Soil is immediately removed into an external strainer, which saves operating costs and protects the machine
- **VISIOTRONIC-TOUCH control:** colour touchscreen (displays text and graphic) in conjunction with single-button control and remaining cycle time indication
- **WASHSMART app:** controlling your warewash operation with smart technology: status and messages, usage and operating costs, hygiene, service and consumables order
- **XL wash chamber:** the large hood and chamber provide best wash results, e.g. for
  - up to 24 plates/rack
  - up to 8 sheets 600 x 400 mm
  - up to 8 trays 660 x 500 mm
  - up to 2 1/1 GN-boxes
- **SENSO-ACTIVE resource management:** constantly measures the quality of the wash water and keeps the amount of rinsing needed in each rinse cycle to the minimum in order to guarantee a fully hygienic wash result
- **Eco programme:** switchable steam rinse cycle reduces fresh-water consumption to 1.4 l/cycle. Saving of up to 44 % water and chemicals
- **VAPO-ACTIVE steam washing:** significantly less manual pre-cleaning and second runs by intensive wash cycles with steam
- **POWER-PLUS wash programme:** selectable high-pressure programme to wash heavily soiled wash items
- **Exhaust energy storage:** the fully enclosed 4-sided hood keeps steam and energy inside the system: energy saving up to 3 kW, less humidity in the kitchen area and better hygienic conditions
- **CLIP-IN wash and rinse arms:** wash and rinse arms can be removed with one hand and without any tools
- **ROTOR-X wash system:** separate rotating upper & lower 4-spoke wash arms deliver dynamic wash power
- **VAPOSTOP (optional):** prevents vapour escaping from the machine when the hood is opened
- **Intelligent energy management:** the available energy is used continuously. Thus, at a low total loading value the heating time gets reduced
- **Interlocked strainer:** prevents operation without tank strainer
- **Optional refill signal:** monitors contents of external chemical containers
- **EASY-CLEAN concept:** blue markings in the machine help the operator to identify the components which require cleaning
- **Thermolabel 71 °C:** default temperatures setting acc. European DIN can be switched by operator to a higher thermolabile setting